



*Pro-Charge*

# TL


## Battery Charger



**MADE IN ITALY**



- New electronic controller with AP070 card with microprocessor.
- Input supply from mains: 110V / 230V
- Lab-tested electronic circuit conforming to Directive on Electromagnetic Compatibility and CE marking
- Suitable for rated battery voltages from 12V to 96V, selectable by means jumpers.
- Trimmer for setting the threshold at 2,40V/cell
- DIP switches to select and adjust the charging:
  - Autostart*
  - Final charge time*
  - Quick test*
  - Equalizing charge*
  - Proportional charge*
  - Charge reset due to battery disconnected*

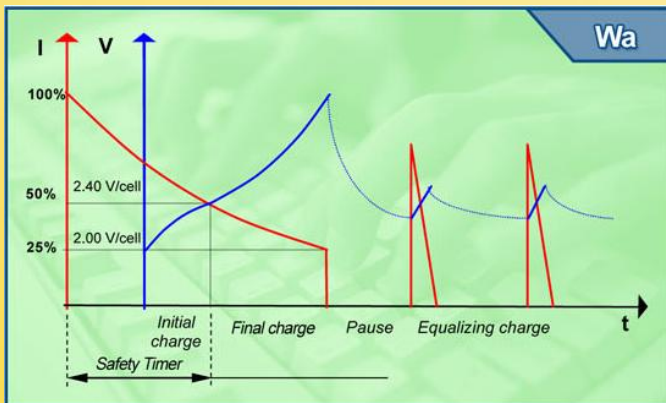

Model	Battery Ah 10 ÷ 11 h	Box dimensions (mm)
24V / 15A	90 ÷ 105	425 (L) 280 (H) 270 (P)
24V / 20A	110 ÷ 140	
24V / 25A	150 ÷ 175	
24V / 30A	180 ÷ 210	
24V / 40A	220 ÷ 280	500 (L) 300 (H) 300 (P)
24V / 50A	300 ÷ 340	
24V / 60A	350 ÷ 400	
36V / 15A	90 ÷ 105	425 (L) 280 (H) 270 (P)
36V / 20A	110 ÷ 140	
36V / 25A	150 ÷ 175	
36V / 30A	180 ÷ 210	500 (L) 300 (H) 300 (P)
36V / 40A	220 ÷ 280	
36V / 50A	300 ÷ 340	
48V / 20A	110 ÷ 140	
48V / 30A	180 ÷ 210	
48V / 40A	220 ÷ 280	

